



Pontoon Lift Bag



Tetrahedron Lift Bag



Enclosed Bottom Lift Bag



Open Bottom Lift Bag

HEAVY DUTY AIR INFLATABLE UNDER WATER LIFT & SALVAGE BALLOONS

The Canflex Heavy Duty Air Inflated products are used worldwide for raising sunken objects, vessel salvage, marine structure stabilization, underwater equipment transport, pipeline and equipment towing, and standby emergency buoyancy. The following is our condensed information list of the lift balloons (also called lift bags) standard product line.

All standard items and sizes shown are fabricated from heavy duty polyester fabric, coated with PVC to ensure excellent air retention and abrasion resistance. All body seams are electronically, high frequency (HF) welded for extra strength.

NO GLUE or sewing of coated fabric.

Lift Bag features include: Design Safety Factor 6:1; Manufactured in accordance with ISO 9001:2015 Quality Management Standard; Independently certified by ABS Consulting - Weight & Volume Certificates available; All lift bags comply with IMCA guidelines for Underwater Lift Bags (IMCA D 016 Rev.5 - January 2022).

BALLOON SHAPED – TOTALLY ENCLOSED/OPEN BOTTOM LIFT BAG

Lift Capacities: 1 tonne thru 50 tonne



The Canflex Model (DLE) Totally Enclosed balloon style & (DL) Open Bottom balloon style lift bags are tear drop shaped units used for supporting loads on the surface of the water or used for lifting objects from any depth, respectively.

These balloons are equipped with one positive venting relief/dump valve mounted in center of the top lift plate. This valve is spring loaded and spring pressure can be set to automatically open when overpressure or can be inverted and used as diver controlled manual dump.



All DLE balloons up to 10 tonne capacity, come with a 146 mm threaded connector and an air tight cap. The use of this bottom fitting allows the bag to be either totally enclosed DLE or open bottom DL.

All balloons come with polyester lift straps treated with special coating to prevent against UV degradation and appropriate screw pin shackle for a single point of lifting. Materials used for fabrication are high tenacity PVC coated polyester fabrics that range of weight from 48 to 89 oz/yd.

TETRAHEDRON SHAPED – ENCLOSED BOTTOM / OPEN BOTTOM – LIFT BAG

Lift Capacities: 100 kg (220 lbs) thru 500 kg (1100 lbs)




The (SLE) Enclosed Bottom or (SLD) Open Bottom lift bags are tetrahedron shaped units equipped with either a positive venting air relief valve or a diver controlled manual dump valve, respectively. The Enclosed Bottom style also has a 98 mm threaded connector with an air tight cap.

ALL bags come complete with polyester lift straps treated with special coating to prevent against UV degradation and D-ring for a single lift point. Material used for fabrication is high tenacity PVC 48 oz/yd coated Polyester fabric.

CYLINDRICAL SHAPED – PONTOON STYLE BUOYANCY UNITS

Lift Capacities: 1 tonne thru 60 tonne

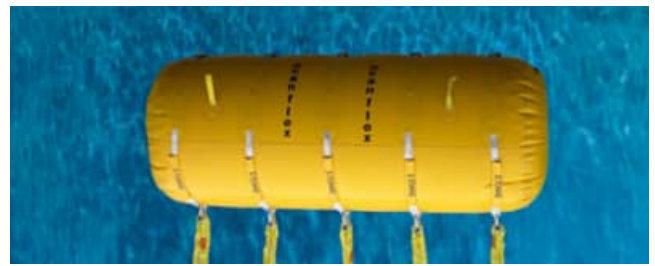

The Canflex Model (ELB) Pontoon bags are cylindrically shaped (totally enclosed units) used for supporting loads. These units are equipped with positive venting relief/dump valves mounted along the top. These valves are spring loaded and spring pressure set to automatically open when overpressure.

We also incorporate into our bag two drain valves with air tight caps on the bottom, these allow the bag to be easily drained if water should find its way into the pontoon.

BALLOON SHAPED - (DLE) TOTALLY ENCLOSED & (DL) OPEN BOTTOM - LIFT BAGS

Model DLE / DL	Lift Capacity		Height		Width		Volume		Shipping Cube		Dry Weight	
	kg	lb	m	ft-in	m	ft-in	m3	ft3	m3	ft3	kg	lb
DLE-1	1000	2200	1.8	5'-11"	1.2	3'-11"	1	35.32	0.15	5.4	20.41	45
DLE-2	2000	4400	2.2	7'-3"	1.5	4'-11"	2	70.63	0.18	6.5	27.22	60
DLE-3	3000	6600	2.6	8'-7"	1.7	5'-8"	3	105.95	0.24	8.4	34.02	75
DLE-4	4000	8800	2.85	9'-4"	1.91	6'-3"	4	141.26	0.3	10.5	39.46	87
DLE-5	5000	11000	3	10'-0"	2	6'-8"	5	176.58	0.4	14	45.36	100
DLE-6	6000	13200	3.35	11'-0"	2.31	7'-7"	6	211.89	0.45	16	54.43	120
DLE-8	8000	17600	3.56	11'-8"	2.38	7'-9"	8	282.52	0.49	17.3	63.5	140
DLE-10	10000	22000	3.84	12'-7"	2.56	8'-4"	10	353.15	0.57	20	74.84	165
DL-12	12000	24000	4.08	13'-4"	2.72	8'-11"	12	423.78	0.68	24	90.72	200
DL-15	15000	33000	4.26	14'-0"	2.98	9'-10"	15	529.73	0.85	30	145.15	320
DL-20	20000	44000	5.96	19'-7"	3.42	11'-3"	20	706.3	1.81	64	172.36	380
DL-25	25000	55000	6.07	19'-11"	3.86	12'-8"	25	882.88	1.81	64	208.65	460
DL-35	35000	77000	6.8	22'-4"	4.29	14'-1"	35	1236.03	1.81	64	249.47	550
DL-40	40000	88000	7.32	24'-0"	4.46	14'-8"	40	1412.6	2.27	80	331.12	730
DL-50	50000	110000	7.62	25'-0"	5.09	16'-8"	50	1765.75	2.27	80	476.27	1050

TETRAHEDRON SHAPED - (SLE) TOTALLY ENCLOSED & (SDL) OPEN BOTTOM - LIFT BAGS

Model	Lift Capacity		Height		Base		Volume		Shipping Cube		Dry Weight	
	kg	lb	m	in	m	in	m3	ft3	m3	ft3	kg	lb
SLE/D-100	100	220	0.85	33.5	0.85	33.5	0.1	3.53	0.012	0.4	3.6	8
SLE/D-272	272	600	1.13	44.75	1.19	47	0.272	9.6	0.014	0.5	4	8.8
SLE/D-500	500	1100	1.33	52.5	1.42	56	0.5	17.6	0.014	0.5	5	11

CYLINDRICAL SHAPED - (TOTALLY ENCLOSED) PONTOON STYLE BUOYANCY UNITS

Model	Lift Capacity		Length		Diameter		Volume		Shipping Cube		Dry Weight	
	kg	lb	m	ft-in	m	ft-in	m3	ft3	m3	ft3	kg	lb
ELB-1	1000	2200	1.44	4'-8"	0.97	3'-2"	1	35.32	0.15	5.4	27	60
ELB-2	2000	4400	1.96	6'-5"	1.17	3'-10"	2	70.63	0.18	6.5	36	80
ELB-3	3000	6600	2	6'-6"	1.4	4'-7"	3	105.95	0.24	8.4	45	100
ELB-5	5000	11000	3.4	11'-2"	1.4	4'-7"	5	176.58	0.4	14	60	133
ELB-6	6000	13200	3.55	11'-8"	1.52	5'-0"	6	211.88	0.4	14	75	165
ELB-8	8000	17600	3.75	12'-4"	1.68	5'-6"	8	282.52	0.49	17.3	85	186
ELB-10	10000	22000	4.1	13'-5"	1.9	6'-2"	10	353.15	0.57	20	121	266
ELB-15	15000	33000	4.30	14'-1"	2.15	7'-0"	15	529.73	0.85	30	193	426
ELB-20	20000	44000	4.51	14'-10"	2.43	8'-0"	20	706.3	1.81	64	229	505
ELB-25	25000	55000	4.82	15'-10"	2.68	8'-10"	25	882.88	1.81	64	277	612
ELB-35	35000	77000	6.52	21'-5"	2.68	8'-10"	35	1236	1.81	64	332	732
ELB-50	50000	110000	8.38	27'-6"	2.92	9'-7"	50	1765.7	2.27	80	633	1400
ELB-60	60000	132000	9.14	30'-0"	3.08	10'-0"	60	2118.8	2.3	82	680	1500

NOTES

- 1000 kg = 1 Metric Tonne = 2205 lbs; 1 Short Ton = 2000 lbs; 1 Long Tonne = 2240 lbs
- Fittings: Flanges made of anodized marine aluminum with stainless steel fasteners
- 1 thru 10 Tonne lift bags shipped in carry/storage bag made of 18 oz/yd² PVC material ; 12 Tonne lift bags and above shipped in Clip-Lok Wood box.
- All underwater lift bags are completely equipped including the appropriate quantity of automatic air relief valves with manual dump capability, lift harness of high strength polyester webbing enclosed in pockets attached to the side of the bag, and shackles attached to the bottom lift harness