



canflex (USA), Inc.

Pillow Tanks

Technical Specifications

Body Material: 28 oz/yd² Urethane (2 m³ to 16 m³)
Body Material: 32 oz/yd² Urethane (20 m³ to 30 m³)
Body Material: 45 oz/yd² Urethane (38 m³ & 500 m³)

Flanges / Connections: 2", 3" & 4" Aluminum with SS bolts
Vent – OPW (PW tanks) or Spark Arrestor (Fuel Tanks)

Capacities: 500 to 132,000 US gal (2 to 500 m³)

Included Accessories

Ball valves: 2", 3" or 4" PVC with camlocks

Ground Sheet: Made of 18 oz/yd² PVC

Toolbox: Repair Kit and Operating Manual

Carry/Storage Bag :(2 m³ to 16 m³)

Shipping /Storage: Clip-Lok plywood box(20 m³ to 500 m³)

Optional Accessories

Sun / UV Covers

Webbing securing harness - Truck/Boat mountable

Secondary Spill Containment System

Berm Liners

Fluid Manifold Fill /Offload system

PVC material also available

6" NPT flanges with M or F camlocks

Custom made tanks with fill /offload ports



Canflex Pillow Tanks are pillow-shaped bladders with a low profile.


Diverse Bulk Liquid Storage and Transportation for Water, Chemicals, Fuel, Oil Spill Response and Recovery.

Quick, Easy Assembly with limited personnel ideal for rapid emergency response. Handles are located around the tank for fast set up/packing. Ready to use with little to almost no site preparation required.

High Quality Material and Fittings Durable Urethane and anodized, marine-grade aluminum with stainless steel fasteners are appropriate for either potable water or hydrocarbons. Tanks ensure complete isolation from surface soil and water.

Common Applications:

Mining, Oil & Gas Exploration, Military Operations, Remote Construction, Firefighting, Disaster Relief, Spill Response, Tank Farms, Forestry Service, Remediation Projects, HAZMAT Operations, Humanitarian Response

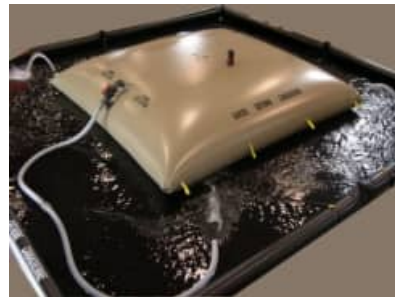



canflex (USA), Inc.

Pillow Tanks

MODEL	Capacity	Width	Length	Height	Dry Weight Without Accessories	Fill/Offload Connections	Vents
	m ³ / Barrels	m	m	m	Kg		
	USG	ft	ft	ft	lbs		
CPT-1CM	1.0 / 6.3	1.9	1.9	0.3	30	2 x 2" NPT	1
	250	6.2	6.2	1.0	60		
CPT-2CM	2.0 / 12.6	1.8	2.7	0.5	36	2 x 2" NPT	1
	500	5.9	9.0	1.5	80		
CPT-4CM	4.0 / 24.0	2.4	3.1	0.6	43	2 x 2" NPT	1
	1,000	8.0	10.1	2.0	95		
CPT-5CM	5.0 / 31.5	2.6	3.0	0.8	75	2 x 2" NPT	1
	1320	8.5	10.0	2.5	165		
CPT-6CM	6.0 / 38.0	3.0	3.0	0.8	85	2 x 2" NPT	1
	1,500	10.0	10.0	2.5	185		
CPT-8CM	8.0 / 50.0	3.4	3.4	0.8	96	2 x 2" NPT	1
	2,100	11.0	11.0	2.7	210		
CPT-10CM	10.0 / 63.0	3.7	4.1	0.9	104	2 x 2" NPT	1
	2,640	12.0	13.5	3.0	230		
CPT-12CM	13.2 / 83.3	3.7	4.7	1.1	120	2 x 2" NPT	1
	3,500	12.0	15.5	3.3	265		
CPT-15CM	15.0 / 94.0	3.7	5.33	1.1	137	2 x 2" NPT	1
	4,000	12.0	17.5	3.3	300		
CPT-16CM	16.0 / 100.0	4.0	5.3	1.1	145	2 x 2" NPT	1
	4,300	13	17.5	3.3	320		
CPT-20CM	20.0 / 126.0	4.26	5.3	1.1	155	2 x 2" NPT	1
	5,300	14	17.5	3.7	340		
CPT-25CM	25.0 / 157.0	5.0	5.18	1.2	170	2 x 2" NPT	1
	6,600	16.5	17.0	4.0	375		
CPT-30CM	30.0 / 189.0	5.0	6.5	1.2	200	2 x 2" NPT	1
	8,000	16.5	21.5	4.0	440		
CPT-38CM	38.0 / 239.0	6.7	6.2	1.2	230	2 x 3" NPT	2
	10,000	22.0	20.3	4.0	510		
CPT-50CM	50.0 / 314.5	6.8	8.0	1.2	273	2 x 3" NPT	2
	13,200	22.5	26.5	4.0	600		
CPT-60CM	60.0 / 377.0	6.8	9.7	1.2	305	2 x 3" NPT	2
	15,800	22.5	32	4.0	670		
CPT-75CM	75.0 / 472.0	6.7	8.22	1.7	330	2 x 3" NPT	2
	20,000	22.0	27	5.7	720		
CPT-100CM	100.0 / 629.0	6.7	10.7	1.7	363	2 x 3" NPT	2
	26,400	22.0	35.0	5.7	800		
CPT-150CM	150.0 / 944.0	6.7	16.1	2.0	545	2 x 3" NPT	2
	40,000	22.0	53.0	6.6	1,200		
CPT-200CM	200.0 / 1,258	6.7	21.0	2.0	727	2 x 3" NPT	2
	52,800	22.0	69.0	6.6	1600		
CPT-250CM	250.0 / 1,572	8.53	21.0	2.0	910	2 x 4" NPT	4
	66,000	28.0	69.0	6.6	2000		
CPT-380CM	380.0 / 2,390	9.75	27.4	2.0	1,210	2 x 4" NPT	4
	100,000	32	90.0	6.6	2,660		
CPT-500CM	500.0 / 3,145	9.75	36.0	2.0	1,590	2 x 4" NPT	4
	132,000	32	118.0	6.6	3,500		