

360 Gold Telemetry Load Links

With ALRS2 handset

Our answer to measurement of Tensile load in heavy industrial applications



Features of ALRS2 electronics

- 250 metre range
- Constant peak and actual load continually displayed
- 5 units of measurement, Tn, Kgs, lbs, US Tons, kN
- Internal antenna
- Display light for easy viewing
- Fast update speed
- Simple battery change out
- Optional logging package
- Easy to use




Features of JCM Gold telemetry load links

- Full O-ring sealing
- Lightweight aerospace aluminium
- Flush covers
- Full traceable calibration
- Temperature compensated
- 360° radio output
- Units available from 2.5 to 500 Tonne
- 1 year battery life option on load link

360 gold Telemetry Load Links

Our answer to measurement of tensile load in heavy industrial applications

MODEL	CAPACITY Tonne (Metric)	A	B	C	D	E	WEIGHT
		mm	mm	mm	mm	mm	Kg
		in	in	in	in	in	Lb
JCM-5LC	5	26	226	130	293	39	2.6
		1.02	8.90	5.12	11.54	1.54	5.7
JCM-12.5LC	12.5	44	226	130	324	50	5.3
		1.73	8.90	5.12	12.76	1.97	11.7
JCM-25LC	25	55	290	136	430	61	7.1
		2.17	11.42	5.35	16.93	2.40	15.6
JCM-35LC	35	61	290	140	440	70	9.4
		2.40	11.42	5.51	17.32	2.76	20.7
JCM-50LC	50	75	304	170	480	85	15.0
		2.95	11.97	6.69	18.90	3.35	33.0
JCM-75LC	75	86	306	190	500	100	17.0
		3.39	12.05	7.48	19.69	3.94	37.4
JCM-100LC	100	100	346	194	95	350	167.0
		3.94	13.62	7.64	3.74	13.78	367.4
JCM-150LC	150	120	396	244	680	127	47.1
		4.72	15.59	9.61	26.77	5.00	103.6
JCM-200LC	200	132	442	280	784	150	79.0
		5.20	17.40	11.02	30.87	5.91	173.8
JCM-250LC	250	146	544	300	844	150	117.0
		5.75	21.42	11.81	33.23	5.91	257.4
JCM-300LC	300	160	582	400	1000	150	177.0
		6.30	22.91	15.75	39.37	5.91	389.4
JCM-400LC	400	180	614	400	1096	200	245.0
		7.09	24.17	15.75	43.15	7.87	539.0
JCM-500LC	500	190	600	490	1100	200	510.0
		7.48	23.62	19.29	43.31	7.87	1122.0

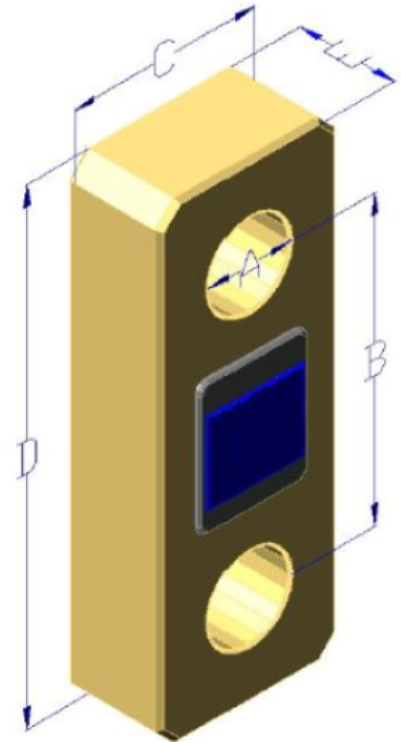

Units from 2.5 to 50 Tonne are supplied in an IP67 transit case,

75 to 500 Tonne units supplied in a hinged wooden transit crate, made with heat treated wood so ready for international shipping

We are able to supply direct from our factory or via our growing list of sales partners worldwide